



**JK LAKSHMI**  
**WALL PUTTY**

PRESENTING

**SMART**  
**WALL PUTTY**  
**COLOUR KI**  
**BEAUTY**




Made from  
high purity  
white cement

Water-resistant

Smooth finish

For exterior & interior

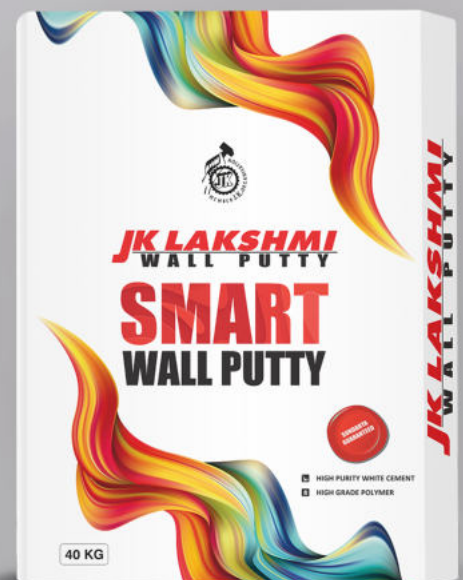

# JK LAKSHMI WALL PUTTY - SMART WALL PUTTY

JK Lakshmi Cement Ltd., a member of the prestigious J.K. Organisation, believes in offering complete construction solutions to the customers. To meet this goal, the Company offers several products such as Cement in various grades, different varieties of Ready-Mix Concrete, Gypsum Plaster, Gypsum Bond, AAC Blocks, Mortars & JK Lakshmi Smart White Cement.

Continuing this endeavour and to offer construction solutions to its customers, the company has now added JK LAKSHMI WALL PUTTY - SMART WALL PUTTY which is a high-grade polymer-based putty. It is applied before painting of the wall (internal/external). Being water-resistant it provides a strong base which prevents paint from flaking.



## SMART FEATURES

- Made from high purity white cement
- High strength polymer based
- Ultra precision grinding results in superior fineness
- Water-resistant



## SMART BENEFITS

- Prevents flaking of paints
- Excellent bonding which increases the life of paints
- Algae and Fungi resistance
- Eco-friendly, it does not contain lead, oil or toxic material
- Can be used for interior & exterior surfaces



## TECHNICAL SPECIFICATION

PROPERTIES	Tensile adhesion strength @ 28 days	Compressive strength @ 28 days	Initial setting time	Final setting time	Water demand
UNITS	N/mm <sup>2</sup>	N/mm <sup>2</sup>	min	min	Percentage(%)
SPECIFICATION	≥ 2	≥ 7	≥ 100	≤ 500	30-40



## METHOD OF APPLICATION

- Make surface clean by removing dust, etc.
- Extract smart wall putty powder with a dry vessel
- Add adequate water (30%-40%) based on climate conditions
- Mix well to make a uniform paste
- Apply this paste on the cleaned surface with trowel
- After drying of 1<sup>st</sup> coat, if needed, apply 2<sup>nd</sup> coat
- Now surface is ready for painting, colouring etc.



## STORAGE

- JK LAKSHMI WALL PUTTY - SMART WALL PUTTY should be stored in a dry place
- Use it within 6 months from the date of manufacturing
- Store the bags on dry platform



## PRECAUTION DURING APPLICATION

- Tools to be used in mixing must be clean
- Coatings must be done on wetted surface only
- Harsh and vigorous use of sand or emery paper should be avoided

**PACKAGING SIZES**  
**1 Kg, 5 Kg, 20 Kg, 30 Kg & 40 Kg**

